

FAN SERIES
P8Y

High performance at low rpm ensures low noise operation, not only fulfilling the needs of many cooling applications, but also helping to reach ErP 2015 compliance.



Hub Size
Max Ø [mm]

3
1222

5
1270

6
1278

6-328*
1336

7
1328

8
1390

* Hubs designed for assembly on clutches.

Combine Harvester



Power Generation



Ducted Fan




Dry cooler



High efficiency for engine and dry cooler applications

High performance with low deflection

The airfoil profile P8Y provides remarkably capable options for applications with high pressure requirements in heavy duty environments.

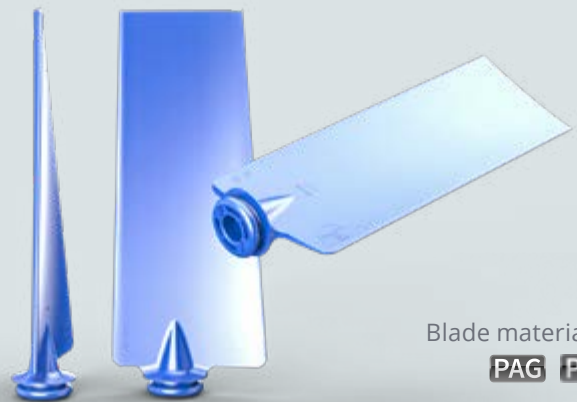

Blade materials
PAG PA

