

FAN SERIES  
**P8Y**

High performance at low rpm ensures low noise operation, not only fulfilling the needs of many cooling applications, but also helping to reach ErP 2015 compliance.



Hub Size  
Max Ø [mm]

3  
1222

5  
1270

6  
1278

6-328\*  
1336

7  
1328

8  
1390

\* Hubs designed for assembly on clutches.

Combine Harvester



Power Generation



Ducted Fan




Dry cooler



**High efficiency for engine and dry cooler applications**

**High performance with low deflection**

The airfoil profile P8Y provides remarkably capable options for applications with high pressure requirements in heavy duty environments.

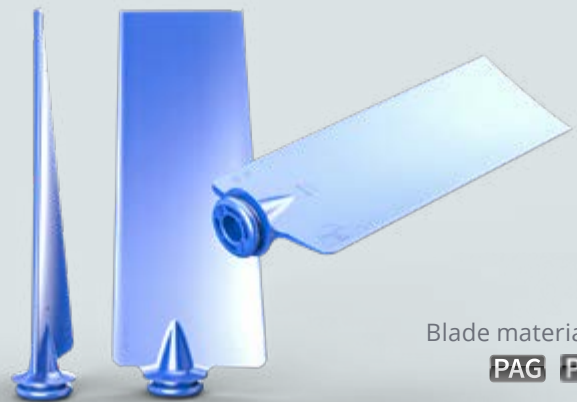

Blade materials  
**PAG PA**

